



Bobbin Cell

Primary Lithium Battery

ER14250 1/2AA 3.6V 1.2Ah



3.6V Primary lithium-thionyl chloride (Li-SOCl2) Energy Type

For low drain/long term operating applications requesting superior voltage response in -55°C ~+85°C environments

Cell size references

1/2UM3-1/2R6-1/2AA

Alternative models LS14250/LST14250/LS14250C/TL4902/TL5902/SB-AA02/XL050F

Electrical characteristics

(Typical values relative to cells stored for one year or less at +30°C max.)

Nominal capacity 1.2Ah (At 0.5mA +20°C, 2.0V cut off. The capacity restored varies according to current, temperature, cut off)

Open circuit voltage (At 20°C) 3.66V

Nominal voltage (At 0.5mA +20°C) 3.6 V

Max. continuous current (at +20°C) 20mA

Typical Max. Pulse current (at +20°C) 50mA

Pulse capability: Typically up to 50mA (50mA/0.1second pulses drained every 2min at 20°C from cells with 10µA base current, yielding voltage readings above 3.0V. The readings may vary according to pulse characteristics, temperature and cell's previous history. Fitting the cell with a capacitor may be recommended in severe conditions. Consult ACT if necessary)

Storage (recommended) +30°C(+86°F)Max

Operating temperature range (High and low temperature will lower the capacity and load voltage.) -55°C~+85°C

Physical characteristics


Diameter(Max) 14.5mm(0.55in)

Height(Max) 25.2mm(1in)

Typical weight 9g(0.3oz)

Available terminal suffix radial tabs, radial pins, axial leads, flying leads

ER14250

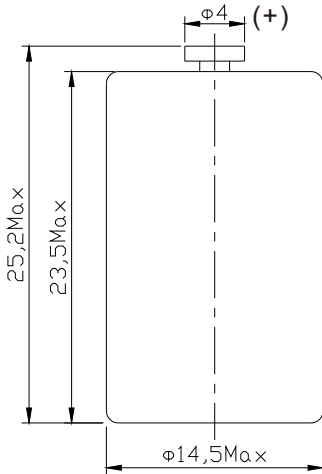

Key features

- >High and stable load voltage
- >Superior drain capacity
- >Low self-discharge rate
(less than 1% after 1 year of storage at 20°C)
- >Stainless steel container
- >Hermetic glass-to-metal sealing
- >Laser welding
- >Non-flammable electrolyte

Main applications

- >Radiocommunication and other military applications
- >TPMS
- >RFID
- >Alarms and security systems
- >Beacons and emergency location transmitters
- >GPS equipment
- >Metering systems
- >Led lighting applications
- >Others

Storage

- >Cells should be stored in a clean & dry (less than 30% RH) area
- >Temp. should not exceed +30°C

Warning

- >Do not use if cell casing is mangled
- >Do not use different model of cell in series
- >Soldering the tag should be finished in few seconds
- >Do not try to recharge

