

Bobbin Cell**Primary Lithium Battery****ER34615 3.6V****3.6V Primary lithium-thionyl chloride
(Li-SOCl₂) Energy Type**

For low drain/long term operating applications requesting superior voltage response in -55°C ~+85°C environments

Cell size references**UM1-R20-D**

Alternative models LS33600/LST33600/LS33600C/TL4930/TL5930**Electrical characteristics**

(Typical values relative to cells stored for one year or less at +30°C max.)

Nominal capacity 19Ah


(At 3mA +20°C, 2.0V cut off. The capacity restored varies according to current, temperature, cut off)

Open circuit voltage (At 20°C) 3.66V**Nominal voltage (At 3mA +20°C)** 3.6 V**Max. continuous current (at +20°C)** 200mA**Typical Max. Pulse current (at +20°C)** 400mA

Pulse capability: Typically up to 400mA (400mA/0.1second pulses drained every 2min at 20°C from cells with 50µA base current, yield voltage readings above 3.0V. The readings may vary according to pulse characteristics, temperature and cell's previous history. Fitting the cell with a capacitor may be recommended in severe conditions. Consult ACT if necessary)

Storage (recommended) +30°C Max**Operating temperature range**
(High and low temperature will lower the capacity and load voltage.) -55°C~+85°C**Physical characteristics****Diameter(Max)** 34mm**Height(Max)** 61.5mm**Typical weight** 99g**Available terminal suffix** radial tabs, radial pins, axial leads, flying leads

ER34615

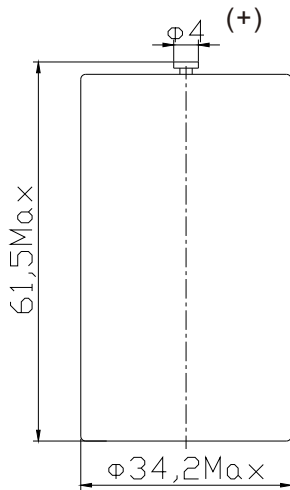

Key features

- >High and stable load voltage
- >Superior drain capacity
- >Low self-discharge rate
(less than 1% after 1 year of storage at 20°C)
- >Stainless steel container
- >Hermetic glass-to-metal sealing
- >Laser welding
- >Non-flammable electrolyte

Main applications

- >Radiocommunication and other military applications
- >Alarms and security systems
- >Beacons and emergency location transmitters
- >GPS equipment
- >Metering systems
- >Led lighting applications
- >Others

Storage

- >Cells should be stored in a clean & dry (less than 30% RH) area
- >Temp. should not exceed +30°C

Warning

- >Do not use if cell casing is mangled
- >Do not use different model of cell in series
- >Soldering the tag should be finished in few seconds
- >Do not try to recharge

